

Joyman Controls Co., Ltd

SPECIFICATION

MODEL NO.: JYVL-CC096-2400

EDITOR: Jason Zhan

Kunshan Joyman Controls Co., Ltd.

Add: No. 15 Ma Tang Road, Economic Development Zone, Kunshan City, Jiangsu
Province, China

Website: www.joymancontrols.com

Tel: +86 512-57617568

Email: sales@joymancontrols.com

1. GENERAL

This specification describes the performance characteristics of a 96W, versatile power supply for LED Lighting.

The model features in:

- 700-2400mA output programmable
- High efficiency: 90% typical @277Vac, full load.
- High power factor: 0.99 typical. @ 120Vac, full load.
- Universal 0-10V Dimmer compatible
- Dimming range 0 to 100%
- With Lighting Protection & all-round protections (SCP, OTP Protection)
- No flicker design and $T_c(\text{max})=90^{\circ}\text{C}$
- 50,000hours lifetime @ $T_c=85^{\circ}\text{C}$
- Comply with UL8750 Class 2



2. ELECTRICAL PERFORMANCE

2.1. Input Characteristics

2.1.1. Input Voltage and Frequency

The range of input voltage is from 108Vac to 305Vac single phase

Input	Min.	Typ.	Max.
Input Voltage	108Vac	120/277Vac	305Vac
Input Frequency	47Hz	50/60Hz	63Hz

2.1.2. Input Current

1.0A max. @ 25°C 120Vac input & Full load

2.1.3. Power Factor

Items	Min.	Typ.	Test Condition
Power Factor	0.97	0.99	120Vac, 25°C, full load
	0.95	0.97	277Vac, 25°C, full load

2.1.4. THD

THD: < 15% @ 25°C 120Vac & 277Vac, full load

2.1.5. Efficiency

Items	Min.	Typ.	Test Condition
Low Line Efficiency	88%	89%	120Vac, 25°C, full load
High Line Efficiency	89%	90%	277Vac, 25°C, full load

2.2. Output Characteristics

2.2.1. Static Output Characteristics

Main Output	Min.	Typ.	Max.
Output Current Programmable	700mA	2400mA	2400mA
Output Voltage Range	10V		54V
Maximum Output Power			96W
Aux. Output (optional)			
Aux Power Output Voltage	+11V	+12V	+13V
Aux Power Output Current			100mA
Maximum Output Power			1.2W

2.2.2. Ripple & Noise

Output: No flicker design

Current Ripple: < $\pm 5\%$ of I_o rating for frequencies of 200Hz or below, at 120Vac&277Vac with full load at 25°C, measured at 20MHz bandwidth.

2.2.3. Output Current Precision

Output:

Output current: $\pm 5\%$ @ 120Vac & 277Vac 25°C, full load

Load & Line Regulation: $\pm 5\%$ @ 120Vac & 277Vac 25°C, full load

2.2.4. Turn-on Delay Time


0.5s max. @ 120Vac, 25°C, Full Load

0.5s max. @ 277Vac, 25°C, Full Load

2.3. Dimming Function

0-10V Dimming

It can support down to 0% Dimming (DIM-OFF function) when dimming voltage reduces less than 1V.

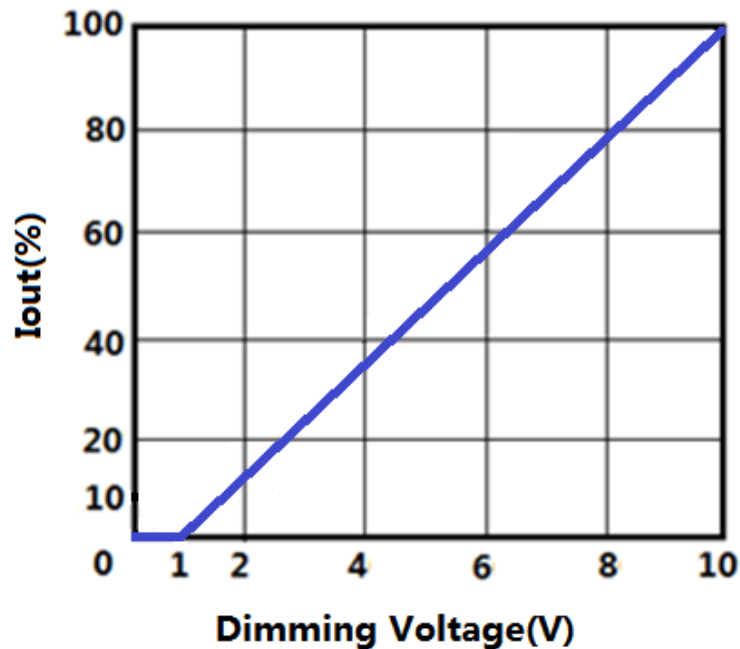


Dimmer List

Dimmer Brand	Dimmer Mode	Dimmer Name
LUTRON	0-10V	DVTV 0-10V
LUTRON	0-10V	DVSTV 0-10V

2.4. Operating Window

Make sure that the LED driver is operated within the given window under all the operation conditions. Special attention needs to be paid at dimming as the forward voltage of the connected LED modules varies with the dimming level.

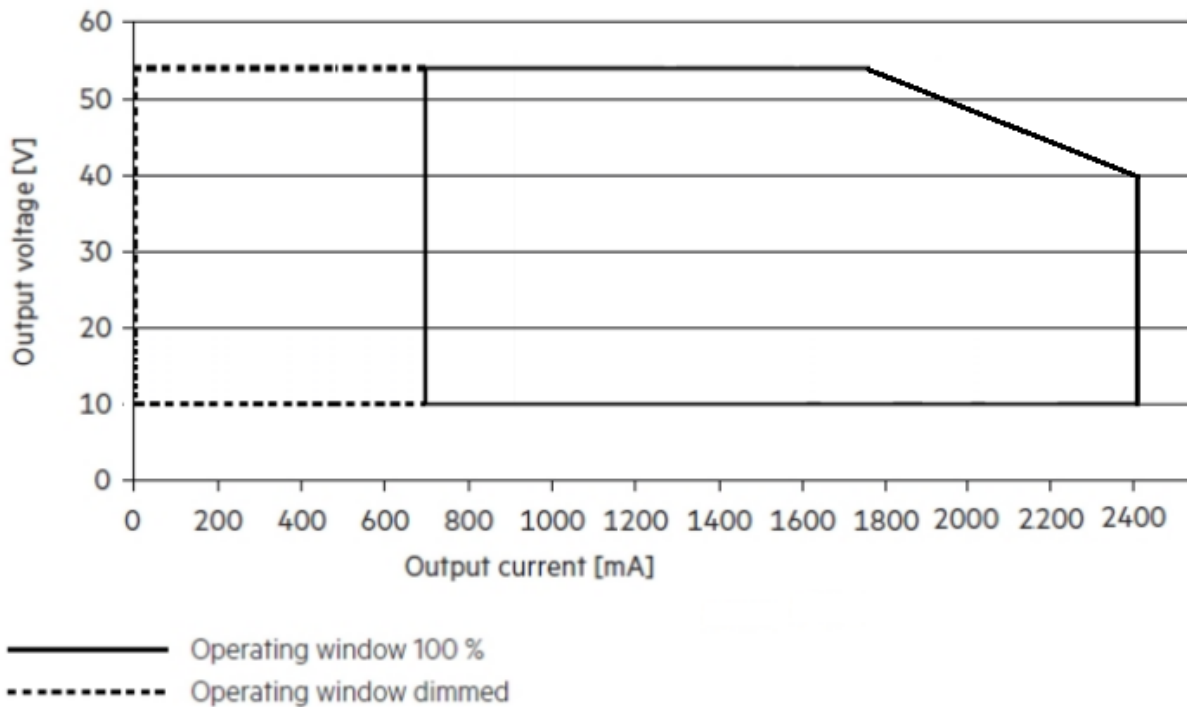

2.5. Protection Circuits

2.5.1. Short Circuit Protection

When its output is shorted, the power supply will enter hiccup mode and shall self-recover when the fault condition is removed.

2.5.2. Over Temperature Protection

When the ambient temp is more than about 70°C, the power supply will reduce to about 50mA output current and recover after the power supply restarts.

10% RH to 85% RH

4.2. Storage Temperature and Relative Humidity

-40°C to +85°C

5% RH to 95% RH

4.3. Waterproof Grade


IP20, IP68 available

4.4. MTBF/Life Time

The MTBF shall be at least 500,000 hours at 25°C, Full load and nominal input condition:

The life time shall be at least 50,000 hours below 85 °C TC temperature, Full load and nominal input condition.

A 5-year warranty can be offered in the condition that TC temperature is no more than 85°C.

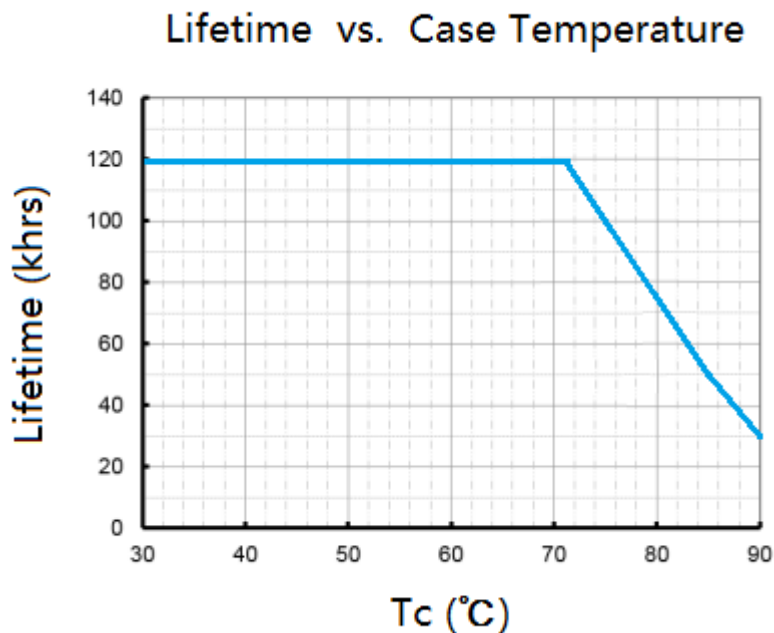

4.5. Aging

The power supply samples shall go a minimum of 4 hours burn-in test at 40 °C ±5 °C under full load condition.

5. REGULATORY

5.1 Agency Requirements

A) Meet UL8750 CLASS 2

B) Dielectric Strength (Hi-pot)

Primary to Secondary: 2500Vac / 10mA Max / 60seconds (3second for production)

C) Leakage Current

0.5mA max. @277Vac / 60Hz

D) Insulation Resistance

50Mohm min. @primary to secondary add 500Vdc test voltage

5.2 Electromagnetic Compatibility

A) EMI:

Comply with FCC PART15 CLASS A

B) IMMUNITY:

EN61000-4-2: ESD 8kV air discharge, 4kV contact discharge, Criteria A

EN61000-4-4: Electrical Fast Transient/ Burst-EFT 2kV/5KHz

EN61000-4-5: Surge Immunity Test, differential and common mode, 2.5kV, combination wave.